










 Book size

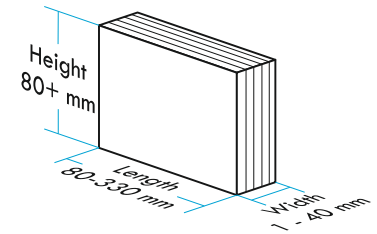

 Cover size

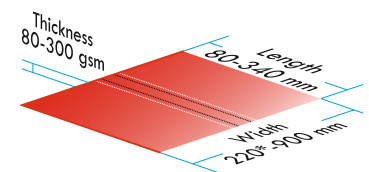

\*Depends on machine specification.



### Standard features:

- Unique closed PUR system (PUR spine and side gluing) (tank capacity: 500g)
- Adjustable glue cut-off from the touch screen
- Adjustable book positioning from the touch screen (max. 10 mm)
- Fix milling depth (0.3 mm) and notching
- Tilttable milling unit
- Adjustable cover thickness
- Large cover holder, with skew adjustment
- Paper dust extractor
- Cover sensor
- 1~230V

### Available options for this model:

- Magnetic bookblock support
- Sideshelf
- Tape binding
- Automatic carriage start
- Glue level indication
- Automatic setup according to block thickness
- Remote service support, Industry 4.0 ready

### Important:

Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately.

<b>SPECIFICATIONS</b>	LAMIBIND PUR
DIMENSIONS OF THE MACHINE (L X W X H MM) / INC. LARGE COVER HOLDER	1560x1020x1235
PACKAGE OF THE MACHINE (L X W X H MM)	1640x1025x1435
NET WEIGHT (KG) - M	340
GROSS WEIGHT (KG) - M	440
POWER SUPPLY (ELECTIVE)	1~230 V-50 Hz / 200-220 V-60 Hz / 100-120 V 60HZ
NOMINAL CURRENT (A)	12 / 14 /25
CAPACITY (kW)	2
COMPRESSED AIR SUPPLY (BAR)	6
LENGHT OF THE BOUND DOCUMENT (MM/INCH)	80-340
THICKNESS OF THE BOUND DOCUMENT (MM/INCH)	1-40
THEORETICAL NUMBER OF WORKING CYCLES (FWD-BWD/HOUR) * THE ABOBE VALUE IS THEORETICAL NUMBER OF THE WORKING CYCLES. THE REAL SPEED AND QUANTITY OF BOOKS CAN BE BOUND ON THE MACHINE DEPENDS ON THE STRENGHT FEATURES OF THE FLUE USED ON THE MACHINE, THE NECESSARY BINDING/NIPPING TIME, THE THICKNESS OF THE DOCUMENT TO BE BOUND, DEOENDS ON THE SKILL AND QUICKNESS OF THE MACHINE OPERATOR, AND THE SELECTED BINDING TECHNOLOGY.	290*
ADJUSTMENT OF THE BINDING TIME OF THE DOCUMENT	1-99
BINDING CYCLE COUNTER	YES
<b>MILLING UNIT</b>	
SPINE PREPERATION	FIXED MILLING & NOTCHING
<b>GLUING UNIT</b>	
HEAT-UP TIME (MINUTE)	20-25
TEMPERATURE RANGE OF THE MELTING OF THE GLUE (C/F)	100-200
VOLUME OF THE CLOSED PUR GLUE CONTAINER	SPECIAL CARTRIDGE SYSTEM
ADJUSTABLE LENGTH REGULATION OF THE GLUE APPLICATION (GLUE CUT OFF)	YES
ADJUSTMENT OF THE HEIGHT OF THE PUR NOZZLE	YES
PUR HEATING ZONES	2
STANDBY MODE	YES
<b>BINDING UNIT</b>	
POSSIBILITY TO ADJUST THE POSITION OF THE BOOK BLOCK OVER THE BINDING UNIT	YES
COVER SENSOR	YES
<b>OTHER FUNCTIONS</b>	
PAPER DUST EXTRACTION	YES
USER INTERFACE	TOUCH SCREEN
OPERATING SOFTWARE	RIGO
SOFTWARE UPDATE	YES
ONLINE REMOTE CONTROL	OPTION
<b>OPTIONS</b>	
GLUE LEVEL INDICATION FOR PUR	OPTION
MAGNETIC BOOK HOLDER	OPTION
TAPE BINDING	OPTION
SIDE SHELF	OPTION
AUTOMATIC CARRIAGE START	OPTION
AUTOMATIC SETUP ACCORDING TO BOOK THICNESS	OPTION
REMOTE SERVICE SUPPORT, INDUSTRY 4.0 READY	OPTION

